









FOOD TRUCK SAFETY

The safety requirements in NFPA® codes that apply to food trucks are shown in the diagram below. NFPA code references are in brackets at the end of each checklist item and the red keys correspond to the keys in the diagram.

Key Codes

NFPA 1
NFPA 58, Chapter 16
NFPA 96, Chapter 17

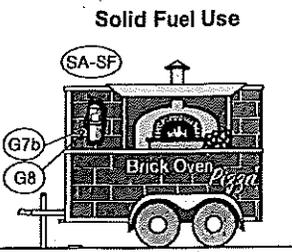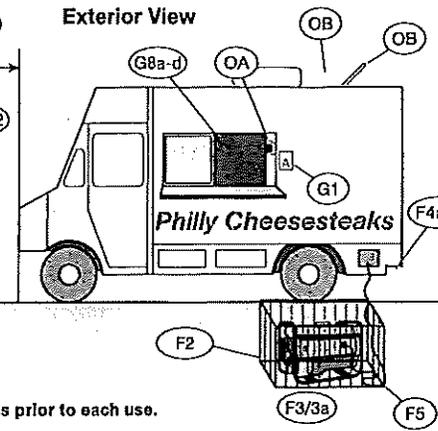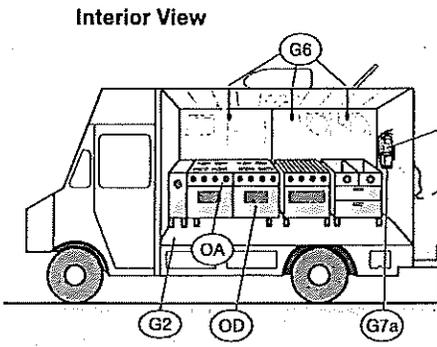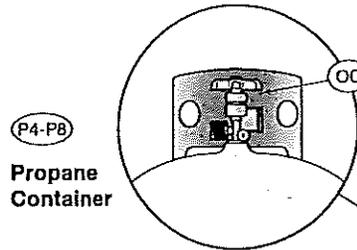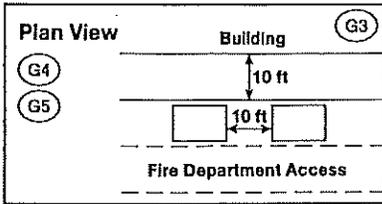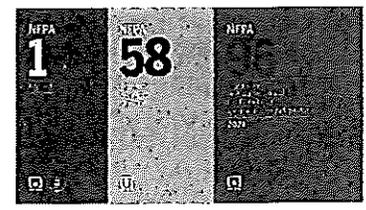

P3 NOTE: Inspect all gas systems prior to each use.

General Safety Checklist

- Obtain license or permits from the local authorities. [1:1.13.8] G1
- Ensure there is no public seating within the mobile food truck. [1:50.8.3.2] G2
- Check that there is a clearance of at least 10 ft away from buildings, structures, vehicles, and any combustible materials or as prescribed by the AHJ. [96:17.2] G3
- Verify fire department vehicular access is provided for fire lanes and access roads. [1:18.2.4] G4
- Ensure clearance is provided for the fire department to access fire hydrants and access fire department connections. [1:13.1.4; 1:13.1.5] G5
- Check that appliances that produce grease-laden vapors and that might be a source of grease in the hood, grease removal device, or duct are protected by fire-extinguishing equipment. [96:10.1.2] G6
- Verify portable fire extinguishers have been selected and installed in kitchen cooking areas in accordance with NFPA 10. [96:10.9] G7a
- Where cooking appliances that use solid fuel, such as charcoal or wood, produce grease-laden vapors, make sure the appliances are protected by listed fire-extinguishing equipment. [96:15.7.1] G7b

- Ensure that workers are trained in the following: [96:17.11] G8
 - Proper use of portable fire extinguishers and extinguishing systems [96:17.11.1(1)] G8a
 - Proper method of shutting off fuel sources [96:17.11.1(2)] G8b
 - Proper procedure for notifying the local fire department [96:17.11.1(3)] G8c
 - Proper procedure for how to perform simple leak test on LP-Gas connections [96:17.11.1(5)] G8d

Fuel & Power Sources Checklist

- Verify that fuel tanks are filled to the capacity needed for uninterrupted operation during normal operating hours. [1:10.14.11.1 for carnivals only] F1a
- Ensure that refueling is conducted only during non-operating hours. [96:17.9.3] [1:10.14.11.2 for carnivals only] F1b
- Check that any engine-driven source of power is separated from the public by barriers, such as physical guards, fencing, or enclosures. [96:17.6.2.2] F2
- Ensure that any engine-driven source of power is shut down prior to refueling from a portable container. [1:10.15.4] F3

| | |
|---|---|
| Dry powder, stored-pressure, with mild steel shells | 6 |
|---|---|

| PORTABLE GENERATORS | COMPLIANCE |
|---|---|
| <p>Generators:</p> <p>CSFPC: NFPA 1: 50.8.5.4: Non-Vehicle Mounted Generators: Generator units that are not vehicle-mounted while in use shall meet the requirements of 50.8.5.4.1 through 50.8.5.4.3.</p> <p>CSFPC: NFPA 1: 50.8.5.4.1: Internal combustion engine power sources shall be located at least 12 ft from mobile or temporary cooking operations.</p> <p>CSFPC: NFPA 1: 50.8.5.4.3: Internal combustion engine power sources shall be positioned so that the exhaust complies with the following:</p> <ol style="list-style-type: none"> 1- Located at least 12 ft from openings, air intakes, and means of egress. 2- In a position pointed away from any building. 3- In a position pointed away from any mobile or temporary cooking operations. | <p><input type="checkbox"/> Yes <input type="checkbox"/> No <input type="checkbox"/> NA</p> <p><input type="checkbox"/> Yes <input type="checkbox"/> No <input type="checkbox"/> NA</p> |

| LP-GAS SYSTEMS & TANKS | COMPLIANCE |
|--|---|
| <p>LP-Gas Systems:</p> <p>CSFPC: NFPA 1: 50.8.7.1.1: LP-Gas cylinders shall be secured in an upright position.</p> <p>CSFPC: NFPA 1: 50.8.7.2.2: Equipment installed on vehicles shall be protected against vehicular damage as provided for container appurtenances and connections in 50.8.7.4.7.5.</p> <p>CSFPC: NFPA 1: 50.8.7.4.6: The LP-Gas supply system, including the containers, shall be installed either on the outside of the vehicle or in a recess or cabinet vaportight</p> | <p><input type="checkbox"/> Yes <input type="checkbox"/> No <input type="checkbox"/> NA</p> |